

Installing your USB to dual serial adapter

NOTE: While this USB adapter provides a very user friendly installation, it is not compatible with every operating system. If you should experience any difficulty with this device, we will replace it with a PCI serial card at no cost to you. Contact your support technician for more information.




1. Install your door controller to side A on the USB to serial adapter and your barcode reader to side B.
2. Plug the USB to Serial adapter into an available USB port on your computer which will be the permanent location for this adapter.
Note: Do not install the USB to Serial adapter to a USB hub and do not move the USB adapter to a different USB port once it is installed.
3. Once the USB adapter has been plugged in, the *New Hardware Wizard* will appear. Select *No, Not at this time* and click *Next*.
4. Select *Advanced Installation*.
5. Place the small CD that accompanied your adapter into your computer's CD drive and select *Floppy and or CD option*. Then click *Next*.
6. Windows will install the *USB Serial Converter* drivers.
7. *Completing the Found New Hardware Wizard* will appear, click *Finish*.
8. *The New Hardware Wizard* will re-appear. Select *No, Not at this time* and click next.
9. Select *Advanced Installation*.
10. Place the small CD that accompanied your adapter into your computer's CD drive and select *Floppy and or CD option*. Then click *next*.
11. Windows will install the *USB Serial Port* drivers.
12. *Completing the Found New Hardware Wizard* will appear, click *Finish*.
13. Once you have installed the above drivers, it will be necessary to restart your computer.

14. Once the computer is restarted, click *Start* then right click on *My Computer* and choose *Properties*.
15. Once the computer properties window appears, click the *Hardware* tab and choose the *Device Manager* option.



16. Once the device manager has opened, scroll to the *Ports* category and expand it by double-clicking it.
17. The following screen will appear. Note the area marked. The two USB serial ports marked (*COM*) in this section signify that the driver installation was successful.

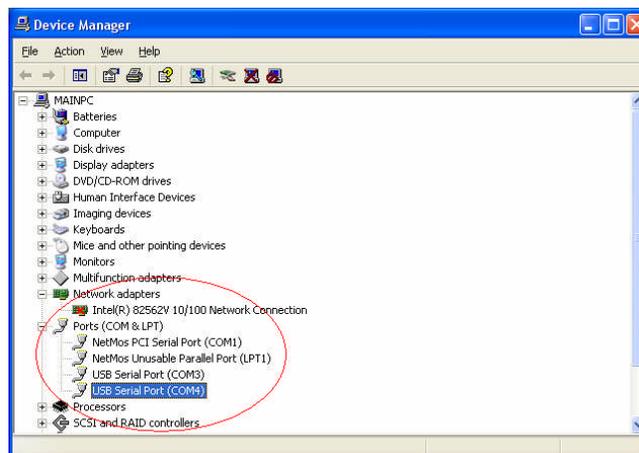

18. Document the two COM port numbers from top to bottom.
 USB Serial Port A: _____ (Door Controller)
 USB Serial Port B: _____ (Serial Barcode)